

TITAN™

PowrCoat™ Series



AIR

POWERED


AIRLESS

SPRAYER



POWERFUL PERFORMANCE

- Models for virtually any applications, including architectural, finishing, industrial maintenance, corrosion control, cold applied roofing, waterproofing and marine protective coatings
- Pumps are designed for easy application of today's low-VOC, high solids and abrasive coatings
- Pressures from 207 to 517 bar (3000 to 7500 psi)
- Severe Service™ paint pumps and high efficiency air motors are standard on all models

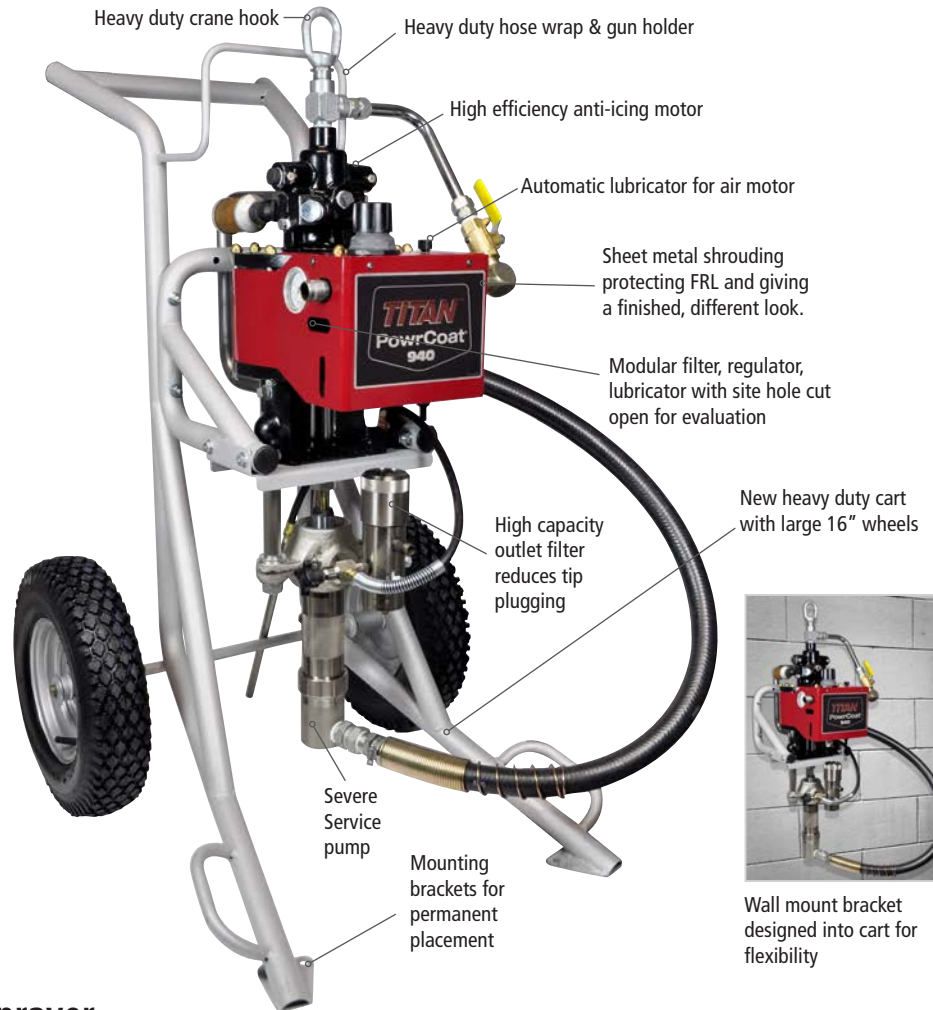

Selecting the Right Air Powered Sprayer

	PowrCoat 730	PowrCoat 745	PowrCoat 940	PowrCoat 960	PowrCoat 975
Air Motor Diameter (inches)	7 ³ / ₈	7 ³ / ₈	8 ⁵ / ₈	8 ⁵ / ₈	8 ⁵ / ₈
Ratio	30:1	45:1	40:1	60:1	75:1
Stroke Length (inches)	4.0	4.0	4.0	4.0	4.0
Maximum Operating Pressure (psi)	3000	4500	4000	6000	7500
Maximum Air Input Pressure (psi)	100	100	100	100	100
Air Volume Requirements (cfm)	84	90	115	115	125
Output per Cycle (cc)	182	114	170	114	95
Free Flow Output (gpm)	8.5	5.3	8.2	5.3	4.4
Output at 90 cpm (gpm)	4.3	2.8	4.0	2.8	2.1
Output at 60 cpm (gpm)	2.9	1.8	2.8	1.8	1.5
Cart Part Number	0533730C	0533745C	0533940C	0533960C	0533975C
Wall Mount Part Number	0533730W	0533745W	0533940W	0533960W	0533975W

Distributed by

Sold exclusively through professional distributors

Visit us at: www.titantool.com/international

All information contained in this brochure is based on the latest information available at time of printing. Titan reserves the right to make changes at any time, without notice.

